# TAC 400-M

TAC-400M

programmable capsule mixer

S

M

LINEA TAC
AMALGAMATOR

ATS Dental
Advanced Technology Solutions

## Mixing.Strong.Always

# TAC 400-M

## computerized and programmable capsule mixer

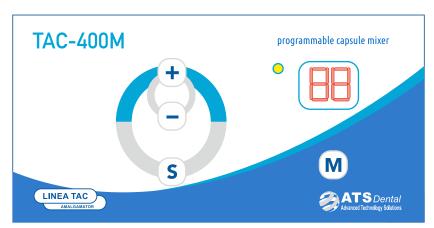**Features and Benefits**

**TAC 400-M** is a computerized and programmable capsule mixer with 10 pre-set memories. The microprocessor controls to provide extreme accuracy for a perfect mix-to-mix consistency and performance, continuosly verifying cycles per minute.

- **«10 Programs»**
- **«Speed»** **4200 rpm**
- **«Time»** that can be adjusted **from 1 to 99 seconds**.

### TAC-400M

programmable capsule mixer

+

−

S

M

LINEA TAC
AMALGAMATOR

ATS Dental
Advanced Technology Solutions

**«LED Display»**
- displays program in use and time

**«M»**
- changes 10 programs

**«+ -»**
- changes mixing times

**«S»**
- mixing Start

**Reinforzed Carbon-Fiber Arms**

---

**Simply to use**
The touch control system is quick and simple to operate. The capsule holder design makes loading and removal easy

**Touch Pad Selector**
4200 rpm speed range ensures the most complete mixing possible

**Universal Arm Design**
Multi use mixer suitable for all types of encapsulated dental materials

**Reinforzed Carbon-Fiber Arms**
More durable than metal arms

**Vibration absorbers. Quite operation and low vibration**
Minimal vibration of all external parts ensures it will not move from its standing position

**Protective Cover**
Covers arms and capsule during high speed mixing to reduce noise. It will immediately stop mixing when the protective cover is open

**Ramp to seed quickly**
It goes to 0 to 4200 cycles per minute immediately

**Easy to disinfect**
The hygienic one surface covers facilitate infection control cleaning and the non-porous plastic surface can be cleaned with any dental disinfectant.

| Model | Code | Description |
|---|---|---|
| TAC 400-M | TAC 1003 | Computerized and programmable capsule mixer |

| TECHNICAL DATA | | | |
|---|---|---|---|
| Model | TAC-400M | Class MD | I rule 12 in Annex IX 93/42/EEC |
| Dimensions | 300x220x170 | Console | IP21 |
| Materials | ABS | 7488 Classification | Type 1 |
| Noise | < 65 dBA | Operating Mode | 30" ON – 180" OFF |
| Supply Voltage | AC 230V | Max Working Time | 30' |
| Frequency | 50/60 Hz | Fuses | 1xT2.0A 250V |

Made in Italy

2 YEAR Warranty